




Tapping screw DIN 7981 A4 PZ

High-quality and durable A4 acid-resistant pan head screw, form C with sharp point. Ideal for use in compliance with DIN 7981C / ISO 7049 standards. This screw features a Pozidriv cross recess, making installation easy and ensuring long-lasting performance.

This DIN 7981 C pan head screw made of A4 acid-resistant stainless steel with PZ drive offers excellent stability and durability. Its sharp point and Pozidrive cross recess make installation easy and efficient.

- Pan head
- Form C, sharp point
- DIN 7981C / ISO 7049
- Pozidriv cross recess
- A4 acid-resistant

Material	Stainless steel A4
RoHS-compliant	Yes

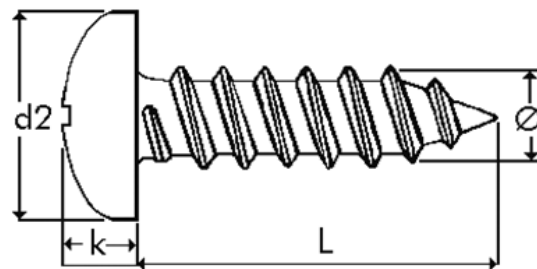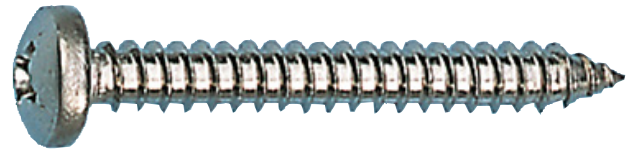

Nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	Internal drive	Art. no.	P. Qty.
2.9 mm	6.5 mm	2.2 mm	Z1	0127 929 65	100
2.9 mm	9.5 mm	2.2 mm	Z1	0127 929 95	100
2.9 mm	13 mm	2.2 mm	Z1	0127 929 13	100/500
2.9 mm	16 mm	2.2 mm	Z1	0127 929 16	100
2.9 mm	19 mm	2.2 mm	Z1	0127 929 19	100
3.5 mm	9.5 mm	2.6 mm	Z2	0127 935 95	100/1000
3.5 mm	13 mm	2.6 mm	Z2	0127 935 13	100/200
3.5 mm	16 mm	2.6 mm	Z2	0127 935 16	100/200
3.5 mm	19 mm	2.6 mm	Z2	0127 935 19	100/200
3.5 mm	25 mm	2.6 mm	Z2	0127 935 25	100/200
3.5 mm	32 mm	2.6 mm	Z2	0127 935 32	100
4.2 mm	13 mm	3.05 mm	Z2	0127 942 13	100

Nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	Internal drive	Art. no.	P. Qty.
4.2 mm	16 mm	3.05 mm	Z2	0127 942 16	100/500
4.2 mm	19 mm	3.05 mm	Z2	0127 942 19	100/500
4.2 mm	25 mm	3.05 mm	Z2	0127 942 25	100/200
4.2 mm	32 mm	3.05 mm	Z2	0127 942 32	100/200
4.2 mm	38 mm	3.05 mm	Z2	0127 942 38	100
4.8 mm	13 mm	3.55 mm	Z2	0127 948 13	100
4.8 mm	16 mm	3.55 mm	Z2	0127 948 16	100
4.8 mm	19 mm	3.55 mm	Z2	0127 948 19	100
4.8 mm	25 mm	3.55 mm	Z2	0127 948 25	100/500
4.8 mm	32 mm	3.55 mm	Z2	0127 948 32	100
4.8 mm	38 mm	3.55 mm	Z2	0127 948 38	100
4.8 mm	50 mm	3.55 mm	Z2	0127 948 50	100
5.5 mm	16 mm	3.95 mm	Z2	0127 955 16	100
5.5 mm	19 mm	3.95 mm	Z2	0127 955 19	100
5.5 mm	25 mm	3.95 mm	Z2	0127 955 25	100
5.5 mm	32 mm	3.95 mm	Z2	0127 955 32	100
5.5 mm	38 mm	3.95 mm	Z2	0127 955 38	100
5.5 mm	50 mm	3.95 mm	Z2	0127 955 50	100
6.3 mm	19 mm	4.55 mm	Z2	0127 963 19	100
6.3 mm	25 mm	4.55 mm	Z2	0127 963 25	100
6.3 mm	32 mm	4.55 mm	Z2	0127 963 32	100/500
6.3 mm	38 mm	4.55 mm	Z2	0127 963 38	100
6.3 mm	50 mm		Z2	0127 963 50	100