




- Die-cast aluminium radiator with 3 front convective fins
- High thermal emission, thus permitting excellent performance with a lower number of sections and consequent space saving in the installation.
- 10 bar as maximum operating pressure
- Long durability, resistance to dilation stresses and corrosion phenomena
- Blocks are assembled in factory in units from 2 to 12 sections
- For the purpose of certification, "PROTEO" radiator corresponds to factory name "ARENA"

DRAWINGS

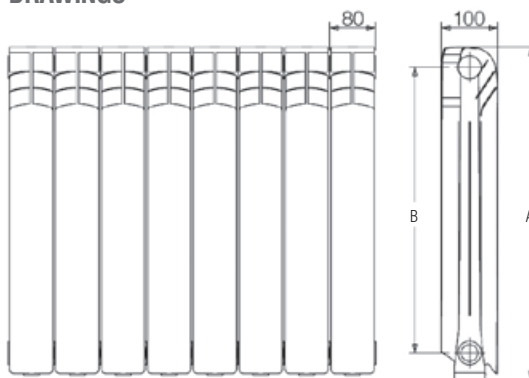

ACCESSORIES

DESCRIPTION	CODE
1" right plug	000250711
1" left plug	000250721
3/4" right reduction	000250771
3/4" left reduction	000250821
1/2" right reduction	000250761
1/2" left reduction	000250811
3/8" right reduction	000250751
3/8" left reduction	000250801
1/4" right reduction	000250741

DESCRIPTION	CODE
1/4" left reduction	000250791
1/8" right reduction	000250731
1/8" left reduction	000250781
1" right/left nipple	000214210
Key for nipples	000214600
65 ml tube of elastic sealant	A71015060
Kit adjustable brackets (2 pcs)	C41015291
Bearing feet for radiators mod. 600 (2 pcs)	C41015360
1/2" air vent	C09276090

Right accessory = clockwise, installation on the left side of the radiator
Left accessory = anti-clockwise, installation on the right side of the radiator

MODEL			450	700	800	900
Thermal emission EN 442	Δt 50°C	W	92	144	161	170
Exponent index n			1,30565	1,3417	1,35387	1,31409
Constant Km			0,5587	0,7467	0,81053	0,995242
Water content		Liters	0,31	0,45	0,5	0,52
Dimensions	Total height (A)	mm	431	681	781	881
	Tapping center (B)	mm	350	600	700	800
Connections	Diameter	inches	1"	1"	1"	1"