

# WIFI Thermostat Technical Manual

## Product Specifications

- Power: 90-240Vac 50/60Hz
- Display accuracy: 0.5°C
- Contact capacity: 16A/250V(WE)
- Range of temperature display: 0~40°C
- Probe sensor: NTC(10k)1%

## Before wiring and installing

- Read these instructions carefully. Failure to follow them could damage the product or cause a hazardous condition.
- Check the ratings given in the instructions and on the product to make sure it is suitable for your application.
- Installer must be a trained and qualified Electrician
- After installation is complete check operation as per these instructions

## CAUTION

Disconnect power supply before installation to avoid electrical shock or equipment damage.

## Start up

Where possible you should set up the Wifi by using the attached manual. If unable to do so please see guide below.

When you turn on the thermostat for the first time you will need to set the time and also the number that corresponds to the day of the week (1-7 starting from Monday). This can be done by following the steps below:

- Press the  button and the time in the top left corner will start flashing.
- Press  or  to get to the desired minute and then press 
- Press  or  to get to the desired hour and then press 
- Press  or  to change the day number. 1=Monday 2= Tuesday 3=Wednesday 4=Thursday 5=Friday 6=Saturday 7=Sunday – Once you have selected the day press  to confirm


You will now be ready to set the temperature. This can be done by pressing  or . The set temperature is displayed in the top right corner.

It is recommended to start out at a low temperature and increase the temperature 1 or 2 degrees a day until you reach a comfortable heat. This only needs to be done once.

Please see the operation key list which shows all the additional functions per button. These can all be controlled via the mobile app if you have paired your device (see attached pairing instructions)

Always check that the temperature limit for the floor probe is set to a suitable temperature for your flooring (typically 27°C). This can be done in the advanced setting menu A9 (see next page)


## Displays

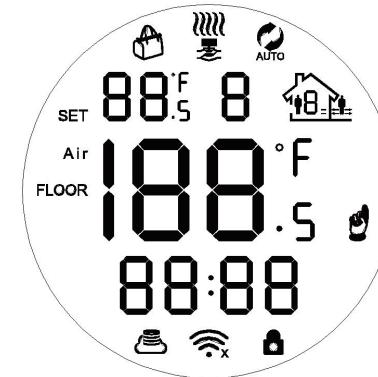

## Description of icon

-  Auto mode; run preset program
-  Temporary manual mode
-  Holiday mode
-  Heating, icon disappears to stop heating
-  WIFI connection, flashing = EZ distribution mode
-  Cloud icon: flashing = AP distribution network mode
-  Manual mode
-  88:88 : Clock
-  Wifi status: Disconnection
-  FLOOR NTC External NTC sensor
-  Child lock

## Wiring Diagram

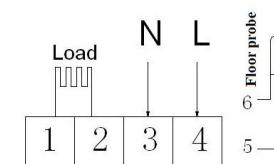

Electric heating wiring diagram

Connect the heating mat to 1 & 2, connect the power supply to 3 & 4 and connect the floor probe to 5 & 6. If you connect it wrongly, there will be a short circuit and the thermostat may become damaged and the warranty will be invalid.

## Operation key

NO	symbols	represent
----	---------	-----------

<b>A</b>		Turn ON/OFF: Short press to turn on/ turn off
<b>B</b>		<ol style="list-style-type: none"> <li>1. Short press </li> <li>2. Turn on thermostat then long press </li> <li>3. Turn off thermostat then long press </li> </ol>
<b>C</b>		<ol style="list-style-type: none"> <li>1 Confirm key: use it with </li> <li>2 Short press it to set time</li> <li>3 Turn on thermostat then long press it for 3-5seconds to enter holiday mode setting.</li> <li>Appear OFF, press  or  change to ON, then press </li> <li>to confirm activation of holiday mode</li> </ol>
<b>D</b>		<ol style="list-style-type: none"> <li>1 Decrease key</li> <li>2 Long press to lock /unlock</li> </ol>
<b>E</b>		<ol style="list-style-type: none"> <li>1 Increase key :</li> <li>2 Long press to display external sensor temperature</li> <li>3 In the Auto mode, press  or  enter to temporary manual mode</li> </ol>

### Programmable

5+2 (factory default), 6+1 and 7 day models contain 6 time periods to automate. In the advanced options choose number of days required, when power is on then long press for 3-5 seconds to enter into programming mode. Short press to choose: hour, minute, time period, and press and to adjust data. Please note after about 10 seconds it will automatically save and exit. See example below.

Wake Up	Leave Home	Back Home	Leave Home	Back Home	Sleep
6: 00	20°C	8: 00	15°C	11: 30	20°C

6: 00 20°C 8: 00 15°C 11: 30 20°C 13: 30 15°C 17: 00 20°C 22: 00 15°C

The optimum comfort temperature is 18°C-22°C.

### Advanced options

When the thermostat is off long press for 3-5 seconds to access advanced setting. From A1 to AD, short press to choose the option, and adjust data by /, short press to switch next option.

NO	Setting Options	Data Setting Function	Factory Default
<b>A1</b>	Measure Temperature Calibration	-9+9°C	0.5°C Accuracy Calibration
<b>A2</b>	Temperature control return difference setting	0.5-2.5°C	1°C
<b>A3</b>	External sensors limit temperature control return difference	1-9°C	2°C
<b>A4</b>		N1:Built-in sensor (high temperature protection close)	N1

	Options of sensor control	N2:External sensor (high temperature protection close) N3:Built-in sensor control temperature ,external sensor limit temperature (if the external sensor detects the temperature is higher than the limited temperature of external sensor the thermostat will disconnect relay and turn off load)	
<b>A5</b>	Children lock setting	0: half lock 1: full lock	0
<b>A6</b>	Limit value of high temperature for external sensor	1. 35°C-70°C 2. Under35°C, screen display <td>35°C</td>	35°C
<b>A7</b>	Limit value of low temperature for external sensor(anti-freeze protection)	1. 1-10°C 2. Exceed 10°C, screen display <td>5°C</td>	5°C
<b>A8</b>	Setting temperature lowest limit	1-10°C	5°C
<b>A9</b>	Setting temperature highest limit	20-70°C	35°C
<b>AA</b>	Descaling function	0: Close descaling function 1: Open descaling function (if valve is continuously closed for over 100 hours, it will be opened for 3 minutes automatically)	0:Close descaling function
<b>AB</b>	Power with memory function	0: Power with memory function 1: Shutdown power after power off 2: Shutdown power after power on	0:Power with memory function
<b>AC</b>	Weekly programming selection	0: 5+2 1: 6+1 2: 7	0: 5+2
<b>AD</b>	Restore factory defaults	Restore to factory settings	

**Sensor fault display:** Please choose correct setting of built-in and external sensor (option A4), if chosen wrongly or if there is a sensor fault (breakdown) then error "E1" or "E2" will be displayed on the screen. Thermostat will stop heating until the fault is eliminated.

### Warranty:

We offer the warranty of 24 months, from the day of purchase. Beyond the warranty period we will charge for the after-sale service.