Heating Thermostat WIFI Debugging Diagram

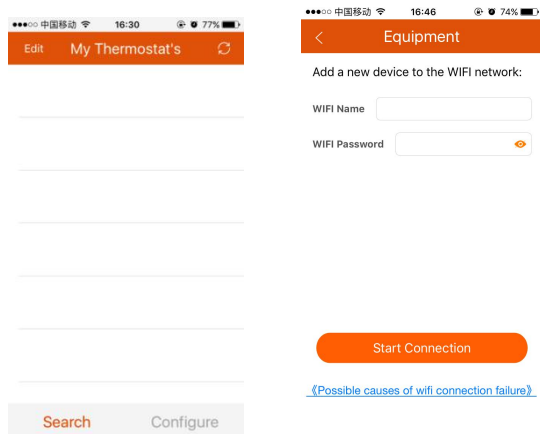### 1.

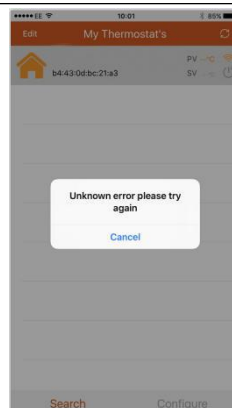**Android App**　　　　　**Iphone App**

App store input lin rongfeng

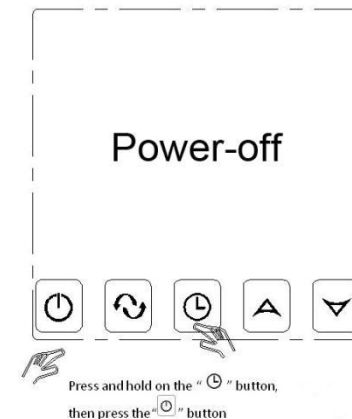### 2.Enter the local WiFi name and WiFi password

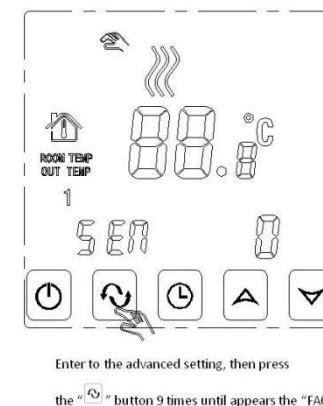### 3.please check the advance setting ,set the Add to

4.Press and hold on the" ⏻ " button, then press the " 🕐 "

Power-off

Press and hold on the " 🕐 " button, then press the " ⏻ " button

5.Enter to the advanced setting, then press the " ↻ " 9 times until appears the "FAC"

ROOM TEMP
OUT TEMP

1

SEN　　0

Enter to the advanced setting, then press the " ↻ " button 9 times until appears the "FAC"

6.When appear the "FAC" button,then press the" ⌃ " button and up-regulation to "32"

ROOM TEMP
OUT TEMP

1

FAC　　8

When appear the " FAC " button, then press the " ⌃ " button and up-regulation to "10" or "32"
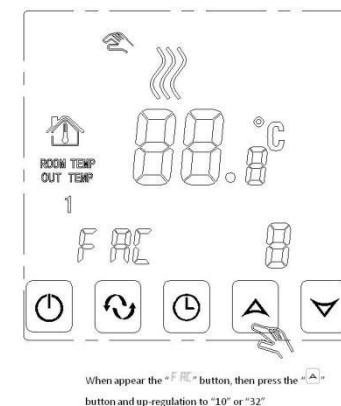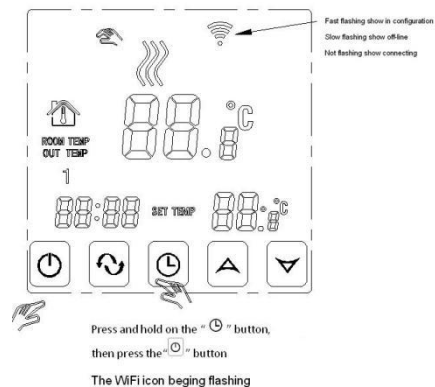
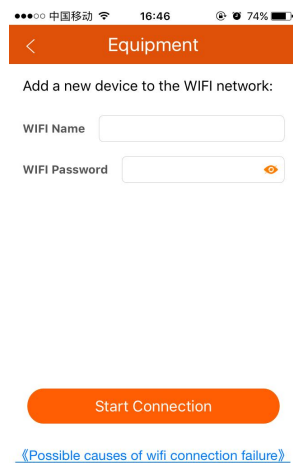**7.Press the power key, then the thermostat will be shutdown**
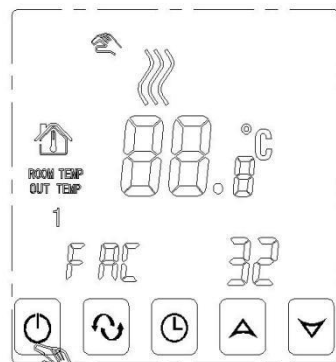
Press the power key, the the
thermostat will be shutdown

8.Press and hold on the " ⏻ " button, then press the " 🕐 ", the wifi icon beging flashing WiFi fast flashing show

Fast flashing show in configuration
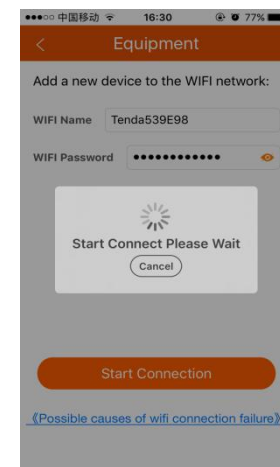Slow flashing show off-line
Not flashing show connecting

Press and hold on the " 🕐 " button,
then press the " ⏻ " button
The WiFi icon beging flashing

9.Enter the WiFi name and password, then start connection

●●●○○ 中国移动 📶   16:46   ⊕ ✿ 74% ▮▮

<   Equipment

Add a new device to the WIFI network:

WIFI Name

WIFI Password   👁

Start Connection

《Possible causes of wifi connection failure》

10.If the thermostat and the mobile phone connection is success, the WiFi icon will stop flashing

●●●○○ 中国移动 📶   16:30   ⊕ ✿ 77% ▮▮

<   Equipment

Add a new device to the WIFI network:

WIFI Name   Tenda539E98

WIFI Password   ●●●●●●●●●●●● 👁

Start Connect Please Wait
Cancel

Start Connection

《Possible causes of wifi connection failure》

11.Finished configure, get to the search list and click the thermostat equipment

Search List   ↻

DV31378
b4:43:0d:bc:2c:b7   📶

12.