


### Uni-Tank

Tank-collector-hydraulic separator for systems with a heat pump

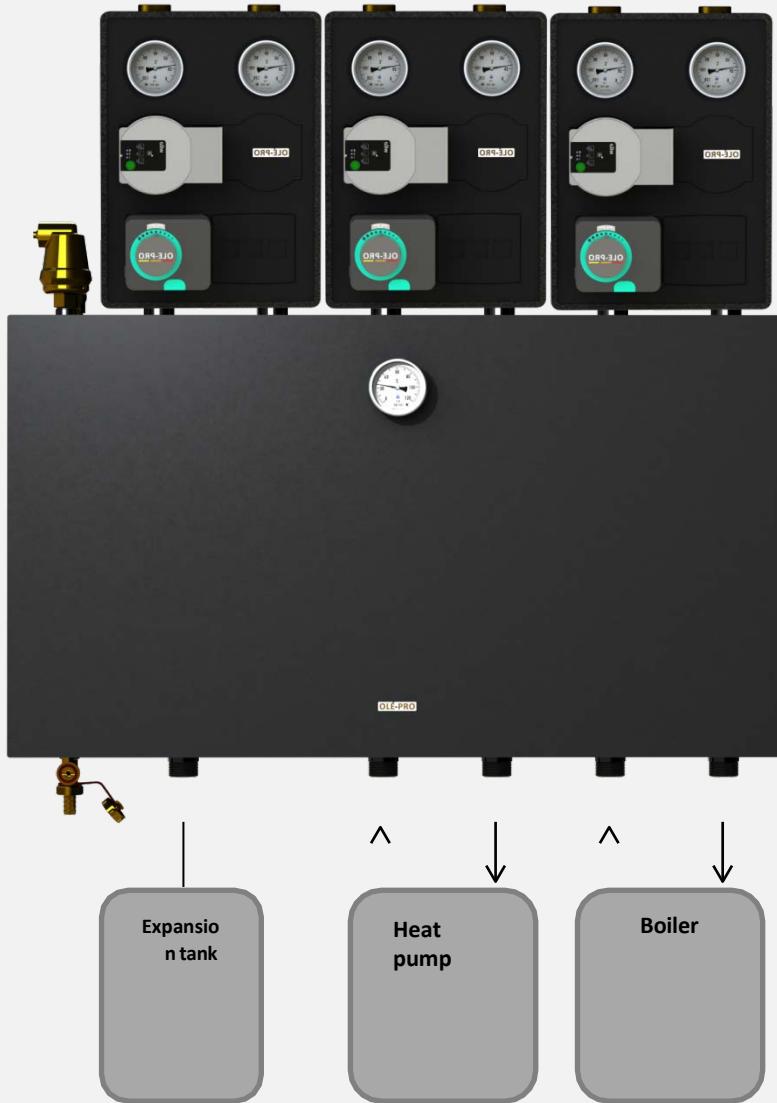

#### Three elements heating system in one

- **Tank with a volume** of 40-60-100 liters (depending on the model)
- **Manifold** for 2-3 groups of pumps (depending on the model)
- **Hydraulic separator** with deaerator
- **Possibility** to connect 2 heat sources,

for example: **heat pump + boiler**

The distance between centers on the pipes connecting to the heat sources is 125 mm. This allows you to connect either a group of pumps to connect a heat source or use 1 pair of these pipes to connect another consumer

- 1" pipe for connecting the expansion tank
- 2 options for thermal insulation

- ✓ Standarta - 26 mm ERR 40 g/l
- ✓ Pastiprināts – 10 mm gumija + 26 mm ERR 40 g/l

#### Uni-Tank Complete Kit:


- Wall mounting kit
- Isolation
- Thermometer
- Faucet for sewage (only in configuration A)
- **SPIROTOP** air separator (only in configuration A)
- Automatic deaerator (only in A configuration)
- Safety valve 2.5 bar 1/2" (only in configuration A)

(!) The pump group is not included in the package


#### Specifications:

- Working pressure - 2.5 bar
- The maximum working temperature is 95°C
- Connection to heat sources - 1"
- Distance of pipes from center to center for connecting to heat sources - 125 mm
- Connection to pump groups - 1 1/2" connecting nut
- Distance from center to center for connecting groups of pumps - 125 mm
- Connection to expansion tank - 1"

### Overall and connecting dimensions

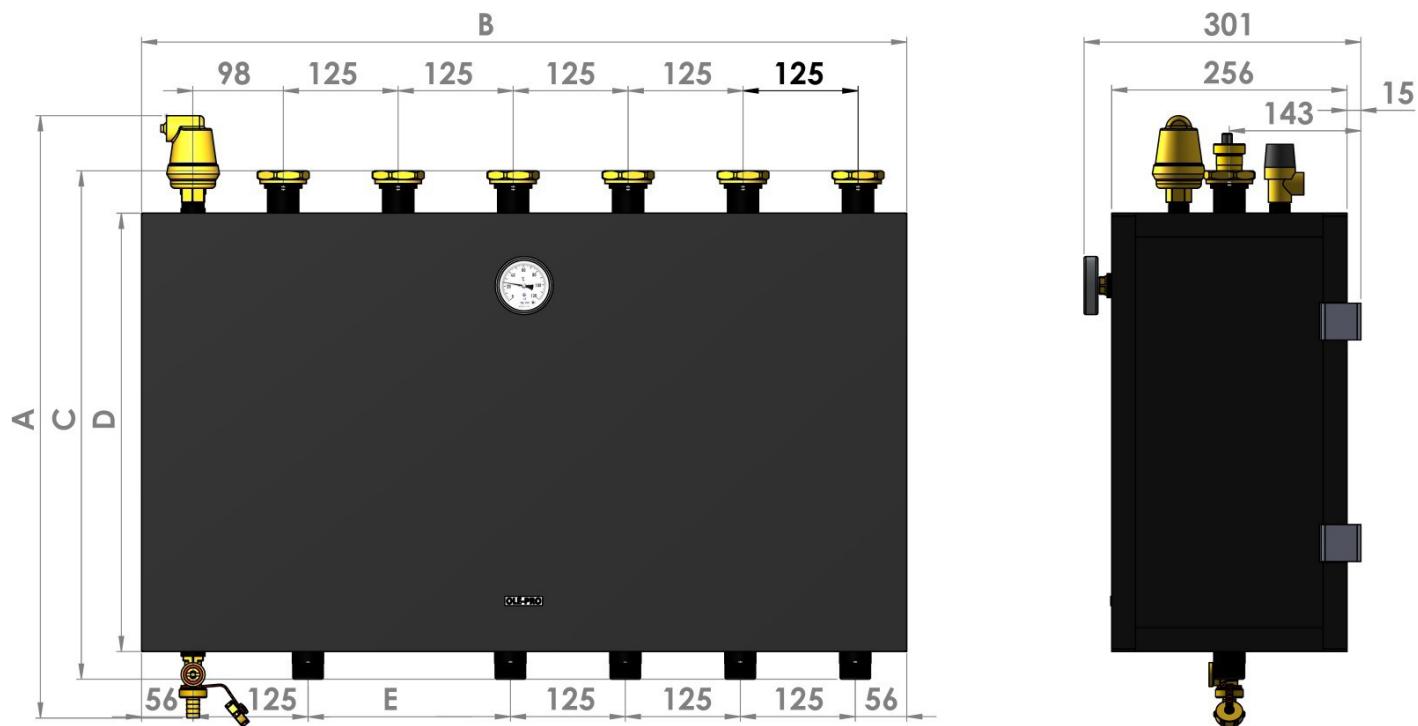

### Flow diagram of the coolant in the Uni-Tank

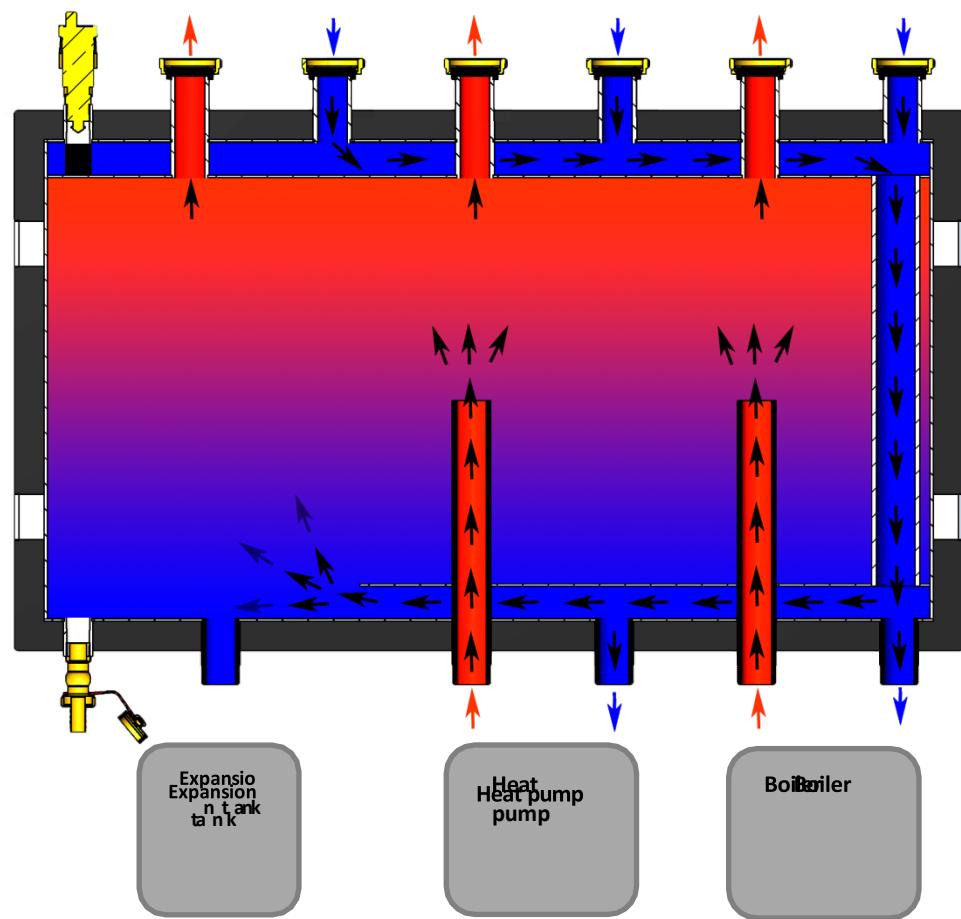



Article	Number of consumer circuits (pump groups)	Volume, l	A, mm	B, mm	C, mm	D, mm	E, mm	Price, EUR with VAT, complete set A	Price, EUR with VAT
<b>In insulation 26 mm ERR 40 g/l</b>									
OTU- 40-3-D-i	3	40	518	832	416	340	220	737.00	492.00
OTU- 60-2-D-i	2	55	654	712	552	476	100	754.00	509.00
OTU- 60-3-D-i	3	60	654	832	552	476	220	815.00	570.00
OTU- 100-2-D-i	2	90	938	712	836	760	100	872.00	627.00
OTU- 100-3-D-i	3	100	938	832	836	760	220	916.00	671.00
<b>Insulation rubber 10 mm + 26 mm ERR 40 g/l</b>									
OTU- 40-3-D-i +	3	40	518	852	416	360	220	752.00	507.00
OTU- 60-2-D-i +	2	55	654	732	552	496	100	784.00	539.00
OTU- 60-3-D-i +	3	60	654	852	552	496	220	843.00	598.00
OTU- 100-2-D-i +	2	90	938	732	836	780	100	902.00	657.00
OTU- 100-3-D-i +	3	100	938	852	836	780	220	964.00	719.00

(!) The pump group is not included in the package